


**Features:**

- Horizontal or Vertical Installation
- Wall and Soffit Application
- Applied over solid substrate or open framing
- Stiffening ribs, striations and pencil ribs available
- Venting for airflow- single, double or triple venting
- ASTM E283 and E331 Tested, ASTM E330 and 1592 Rated

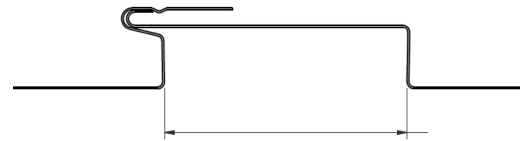

\*OPTIONAL ADJUSTABLE REVEAL  
0" TO 3" IN 1/2" INCREMENTS  
[0mm TO 76.2mm IN 12.7mm INCREMENTS]

**Panel Lengths:**

Minimum panel length - 2'-0"  
Maximum panel length - 40'-0"  
Field forming available for panels over 40'-0"

**Panel Depth:**

1"

**Panel Coverage:**

12" & 20" nominal  
Special width panels available upon request

**Material Options:**

Steel, Aluminum, Copper, and Zinc

**Gauge Options:**

24 gauge standard, 22 gauge optional - Steel  
0.032 and 0.040 - Aluminum  
16 oz and 20 oz - Copper  
0.8 mm and 1.0 mm - Zinc

**Finish Options:**

ProFinish 500 (PVDF) Colors & Acrylic Coated  
Galvalume®, Woodgrain & Specialty finishes upon  
request

**Clarifications:**

RMP recommends all panels to be striated  
to minimize "oil canning".

Purchaser must specify smooth or striated panel on  
order.

RollFab uses top quality materials specifically  
designed for rollforming applications, which are  
tension leveled to help minimize oil canning.

Oil canning is naturally inherent in sheet metal and is  
not a cause for rejection.