

**Features:**

- Horizontal or Vertical Installation
- Applied over solid substrate with proper underlayment.
- Venting for airflow- single, double or triple looped venting available for soffit application
- Stiffening beads available

Testing - Passed:

- ASTM E1592 – Structural – Reference Test
- ASTM E330 – Structural – Reference Test
- ASTM E283 – Air Infiltration – 0.006 cfm/ft2
- ASTM E331 – Water Infiltration – No Leakage

Panel Lengths:

Minimum panel length - 2'-0"
Maximum panel length - 40'-0"

Panel Depth:

1" Depth

Panel Coverage:

8", 12", 16" and 20" Coverage

Material Options:


Panel available in .032" and .040 Aluminum,
16 and 20oz. Copper and Zinc
24 gauge standard
22 gauge optional

Finish Options:

ProFinish 500 (PVDF) Colors & Acrylic
Coated Galvalume®
Copper, Aluminum and Zinc

Clarifications:

RMP recommends all panels to be striated to minimize "oil canning". Purchaser must specify smooth or striated panel on order. RollFab Metals uses top quality materials specifically designed for rollforming applications, which are tension leveled to help minimize oil canning. Oil canning is naturally inherent in sheet metal and is not a cause for rejection.

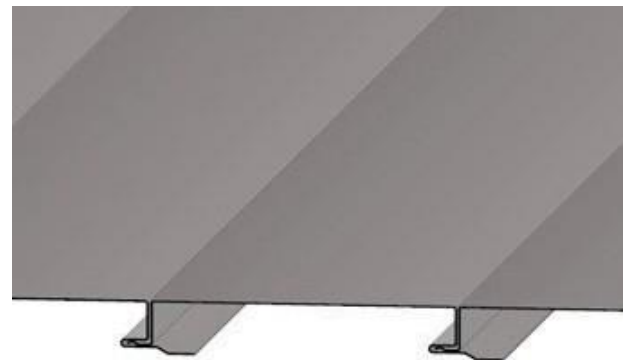

Kynar 500 is a registered trademark of Elf Atochem North America Inc.
Galvalume is a registered trademark of BEIC International, Inc.